



Part 2

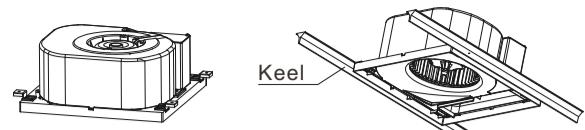

Part 3



2. Place the body clamp assembled with the installation clamp in Part 2 on the iron keel as shown in Part 3 (Ensure that all four mounting clips are smooth).

Panel

3. Install the panel, grip the springs on both sides of the panel with both hands, and push them into the grooves on both sides of the frame. (Ensure that the panel is completely snug against the body after installation)

#### CAUTIONS

1. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
2. Children should be supervised to ensure that they do not play with the appliance.
3. The fan should be installed at 2.3m above the ground.
4. When the ventilating fan is connected with the power circuit, all-polarity switch with at least 3mm contact gap must be in the charging line. Green and Yellow color wire of power supply should be earthed.
5. Precautions must be taken to avoid the back-flow of gases into the room from the open flue of gas or other open-fire appliance.
6. The fan is intended for mounting in outside windows.
7. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
8. Ensure that the fan is switched off from the supply mains before removing the guard.
9. Before installation, should breathe some gum water into the gap, which between the fan body and panel.

#### MAINTENANCE

1. Before beginning any maintenance, be sure to remove the power cord from the power source.
2. Never use petrol, benzene, thinner or any other chemicals for cleaning the fan.


Exhaust fans may adversely affect the safe operation of appliances burning gas or other fuels (including those in other rooms) due to back flow of combustion gases. These gases can potentially result in carbon monoxide poisoning. After installation of an exhaust fan such as a partition fan or a duct fan the operation of flued gas appliances should be tested by a competent person to ensure that back flow of combustion gases does not occur.

If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

#### SPECIFICATIONS


Model	Size (in/mm)	Volt (V)	Fred (Hz)	Input Power (W)	RPM r/min	Noise dB(A)
BREEZE	150	220	50	30	1100	45

#### DIMENSIONS (mm)

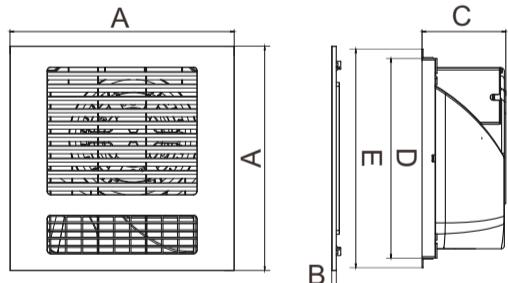

型号	A	B	C	D	E
BREEZE	300	6	112	267	292

#### WIRING DIAGRAM

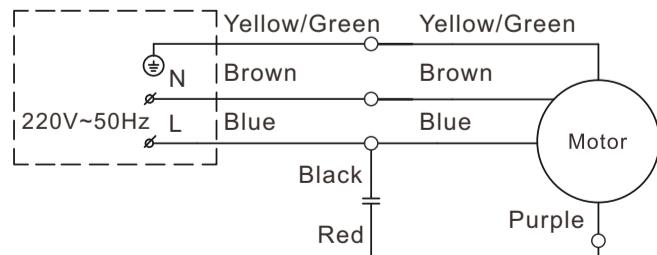

## COOLING FAN

## BREEZE


## Instructions Manual

Please read the instructions carefully before use.

#### INSTALLATION

##### Ordinary ceiling installation method


Part 1

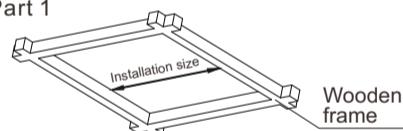

1. Install wooden frames on the ceiling wooden keel according to the installation dimensions of the product, as shown in Part 1.

Part 2

Press the positioning pressure plate

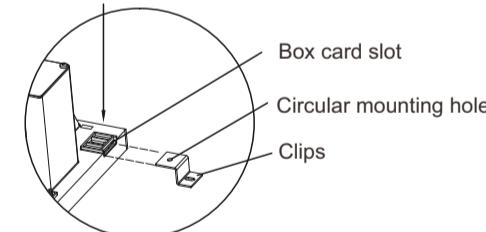


2. As shown in Part 2, insert the four installation clips into the corresponding slots on both sides of the body in the direction shown in the figure (note: the circular installation holes of the installation clips are located above and inserted into the box installation slot as shown in the figure. When inserting, press the positioning pressure plate on the box installation slot at the same time)

Part 3




3. Install the body of the installation clamp in Part 3 firmly with four wooden screws (4 pieces) through the screw installation slot of the installation clamp.



4. Install the panel, grip the springs on both sides of the panel with both hands, and push them into the grooves on both sides of the frame. (Ensure that the panel is completely snug against the body after installation)

##### Integrated ceiling installation method

Part 1

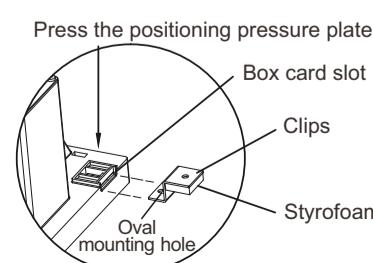

1. As shown in Part 1, apply foam adhesive to the surface of the four installation clips with circular holes, and then insert them into the corresponding card slots on both sides of the box in the direction shown in the figure. (Note: The elliptical installation holes of the installation clips are located below and inserted into the box installation slot as shown in the figure. When inserting, press the positioning pressure plate on the box installation slot at the same time.)