

X 150 (Wall Axial Kitchen Exhaust Fan)

Air Capacity up to
500 m³/h



Application


- Perfect for kitchen smoke extraction
- Suitable for hotel and restaurant ventilation
- Ideal for factory floors and workshops
- Recommended for basements and storage areas
- Effective for general room air circulation and stale air removal
- Best suited for high-heat and high-odor environments

Product Specifications

| | X 150 | X 200 | X 250 |
|-----------------------------|--------------|--------------|--------------|
| Voltage [V] | 220 | 220 | 220 |
| Frequency [Hz] | 50 | 50 | 50 |
| Power (W) | 40 | 80 | 100 |
| Airflow [m ³ /h] | 500 | 850 | 1200 |
| Speed [RPM] | 2800 | 2800 | 2800 |

Mounting

- The fan is designed for direct wall mounting.
- Install the unit securely into a wall opening matching the barrel diameter (150mm / 200mm / 250mm).
- Ensure the fan is fixed firmly using mounting screws on the front panel.
- Connect the fan to 220V-50Hz power supply as per wiring diagram (Live and Neutral connection).
- Electrical installation must comply with local safety standards and wiring guidelines.

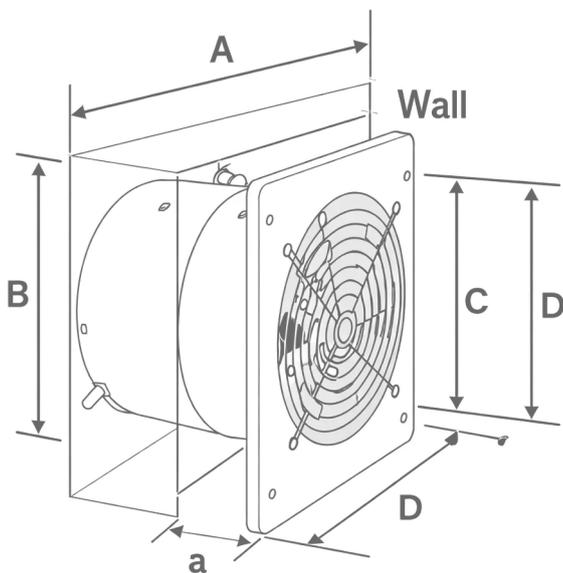

Dimensions

| | Model | | |
|---|-------|-------|-------|
| | X 150 | X 200 | X 250 |
| A | 190 | 250 | 300 |
| B | 150 | 200 | 250 |
| C | 135 | 150 | 160 |
| D | 150 | 200 | 250 |